


DRILLING SUPPORT PUMP
FOR CIRCULATING, CUTTINGS INJECTION & CEMENTING APPLICATIONS

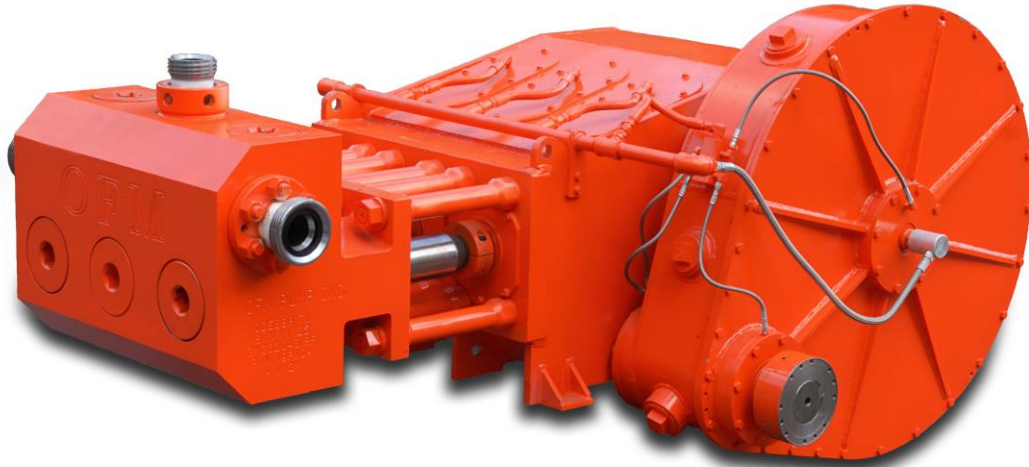

CB-750 DG
INDUSTRIAL DUTY RATING

PUMP SPECIFICATIONS

Pump Type.....	Horizontal, single-acting, plunger
Fluid End Type.....	Monoblock
Horsepower.....	750
Stroke Length.....	8"
Maximum Rod Load.....	125,000 lbs.
Gear Ratio.....	6.353 : 1
Weight.....	9,500 lbs.

PERFORMANCE DATA **

Plunger Diameter (Inches)	Gallons Per Rev.	PUMP SPEED IN CRANKSHAFT REVOLUTIONS PER MINUTE (RPM)									
		75		125		150		175		200	
		GPM	PSI	GPM	PSI	GPM	PSI	GPM	PSI	GPM	PSI
4-1/2	1.65	124	5000	206	5000	248	4650	289	3900	330	3450
5	2.04	153	5000	255	4500	306	3700	357	3150	408	2800
5-1/2	2.46	185	5000	308	3700	369	3100	431	2650	492	2300
6	2.93	220	4275	366	3100	440	2600	513	2200	586	1925
Brake Horsepower		600		750		750		750		750	
Pinion RPM		476		794		953		1112		1271	

** Based on 90% ME and 100% VE.